

shown in Textured Bronze with
Metal Blades and Decorative Cage



Dagny

Designed in 2011



The double-headed 360° rotational fan, Dagny, with cylindrical central housing and straight, parallel arms, is designed in the retrospective aesthetic. The Dagny offers smooth and quiet axial rotation. Its fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews rotational fans circulate heat and air-conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum and heavy stamped steel, the Dagny carries a limited lifetime warranty. The Dagny is also available with a light kit as the **Dagny-LK**.

Product Features



American
Labor



AC
Motor



360°
Rotation



Safety Cage
Compatible



Damp
Location



Soothing
White Noise



Remote
Control



29° Slant
Ceiling Canopy



60° Cathedral
Ceiling Canopy



Unipack
Shipping



shown in Textured Bronze with Barn Wood Blades



shown in Textured Bronze with Matte Black Blades



shown in Textured Bronze with Mahogany Blades



shown in Textured Bronze with Metal Blades and Safety Cage

DAGNY

FINISH AND BLADE OPTIONS

SKU#	DG-XX-XXXX (Model+Finish+Blade)	
Standard Finish	Textured Bronze Matte Black	TB BK
Blade Styles and Material	Solid Wood / Barn Wood Solid Wood / Mahogany Solid Wood / Matte Black Metal w/ Decorative Cage Metal w/ Safety Cage	WDBW WD WDBK MTL MSAF

TECHNICAL SPECS

Fan Weight	22 lbs
Voltage	110 (Contact us for 220 conversion)
Motor Type	AC
Rotation	Yes
Downrods Lengths <i>Field cuttable, Non-Threaded</i>	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Overall Drop	14 inches / 36 cm + downrod length
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.
Ambience	Soothing White Noise
Safety Certification	UL / CUL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Head Options	Solid Wood	Metal with Guard
Fan Diameter	41 inches / 104 cm	39 inches / 99 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Safety Cage or Decorative Cage
RPM (Low / High)	1012 / 1445	1035 / 1448
CFM (Low / High)	2565 / 4168	2199 / 3169
Watts (High)	87.26	80.69
CFM/Watt (High)	50	42
Blade Pitch	19°	31°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Slant ceiling canopy for up to 29°

ACCESSORIES

Black 3-speed RF remote control with reverse




Decora-style, 3-speed, non-dimmable wall control



60° cathedral ceiling canopy

Dagny

TECHNICAL SPECIFICATIONS

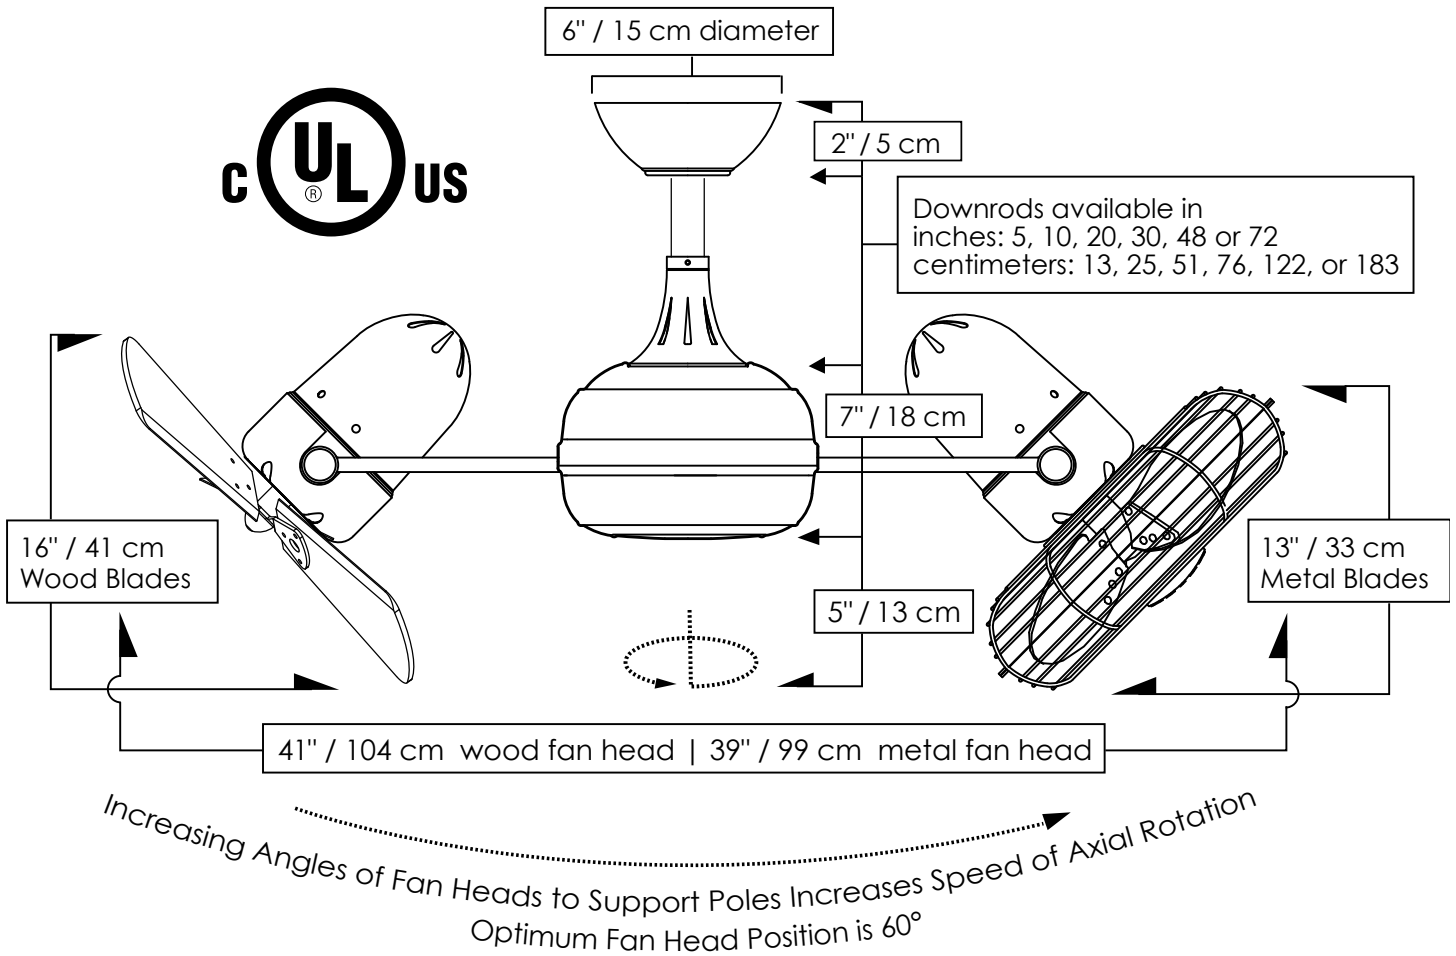

CEILING PITCH TABLE

0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

CEILING HEIGHT / DOWNROD TABLE

Ceiling Height	Downrod Lengths <i>Field cuttable. Non-threaded</i>
10 ft or less	5 inches / 13 cm <i>Use safety cages if applicable</i>
10 -12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm
15 feet	48 inches / 122 cm
16 feet +	72 inches / 183 cm

Matthews Fan Company

1881 Industrial Drive
 Libertyville, IL 60048
 Tele: 847.680.9043
 Fax: 847.680.8140
 www.matthewsfanco.com

© 2023 Matthews Fan Company. All rights reserved.

